


2 0 1 7 S T O C K F A B R I C S

9oz. MARINE GRADE







NBA NAVY BLUE




PBA PACIFIC BLUE



CPA CAPRI



TQA TURQUOISE



PTA PISTACHIO



FGA FOREST GREEN




BGA BURGUNDY



LRA LOGO RED



CRA CORAL



TRA TERRACOTTA



ORA ORANGE




YLA SUNFLOWER
YELLOW



BNA BROWN




TTA TOAST




LNA LINEN




BKA BLACK



CHGA CHARCOAL GRAY



CGA CADET GRAY



WHA WHITE




DISCLAIMER: STRIPE SWATCH COLORS MAY DIFFER SLIGHTLY FROM ACTUAL FABRIC

STRIPES WILL BE HORIZONTAL AFTER SEWN




RSA RED STRIPE **REPEAT: 6.4"**

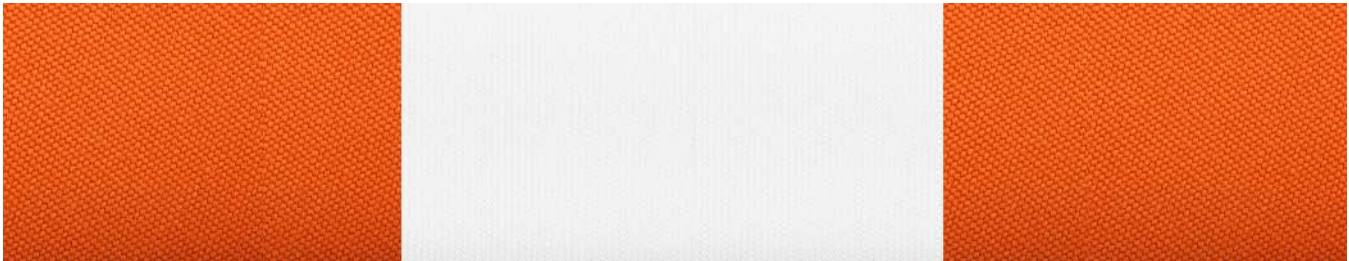

OSA ORANGE STRIPE **REPEAT: 6.4"**




YSA YELLOW STRIPE **REPEAT: 6.4"**

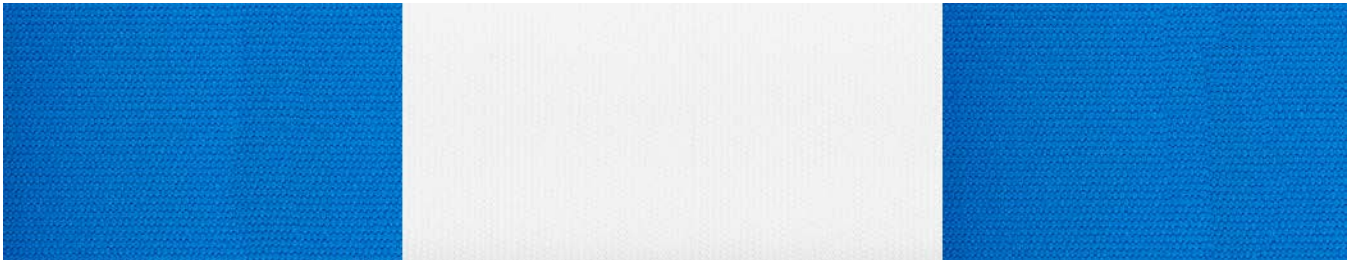

BSA BLUE STRIPE **REPEAT: 6.4"**



TQSA TURQUOISE STRIPE **REPEAT: 6.4"**

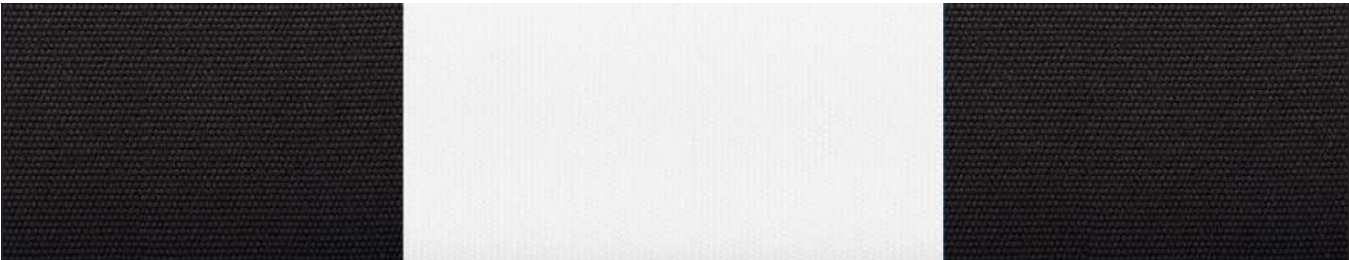

BKSA BLACK STRIPE **REPEAT: 6.4"**

TECHNICAL FEATURES

FTA-67

MARINE GRADE		
COMPOSITION	100% SOLUTION DYED ACRYLIC FABRIC	
WIDTH	47" STANDARD	
	86"/98" (AS PER DESIGN)	
WEIGHT	90Z. ±5%	UNE 53352
WIDTH	47" STANDARD	
FINISH	SPECIAL FINISH FOR AWNINGS. ANTI-STAIN, ROT-PROOF AND WATER RESISTANT.	
WATER COLUMN	>300 MM (ISO 811/81)	UNE EN ISO 20811
OIL REPELLENCY	>5	
WATER REPELLENCY	>5	
TENSILE STRENGTH WARP	125 DAN / 5CM ±5%	UNE EN ISO 13924-1
TENSILE STRENGTH WEFT	70 DAN / 5CM ±5%	UNE EN ISO 13924-1
TEAR STRENGTH WARP	3 DAN / 10%	UNE 53326
TEAR STRENGTH WEFT	2 DAN / 10%	UNE 53326
COLOR FASTNESS	7 - 8	UNE EN ISO 105B02
STANDARD ROLL STRENGTH	60 M / 65,64 YARDS	

www.recasensusa.com





NORTH AMERICAN HEADQUARTERS

FRANKFORD UMBRELLAS

110 GAITHER DR. MOUNT LAUREL NEW JERSEY, 08054 (856) 222 4134

www.frankfordumbrellas.com

WARRANTY

Because S.A. RECASENS fabrics are manufactured with only the highest quality raw materials and the most rigorous quality-assurance procedures, we offer a 7-year warranty on our 100% solution dyed acrylic products.

The warranty protects against the loss of characteristics, rot, mildew and discoloration typical in normal atmospheric conditions. This warranty does not apply against improper cleaning techniques or chemicals used or deterioration of any kind due to misuse by the customer. Accidental burns, negligence, vandalism, perforations, natural disasters or acts of nature, normal wear, weather soiling, or stains from environmental pollution or other sources are not covered and does not cover damage caused by the storage method or location used by our clients.

The product must be properly installed and maintained. The warranty, if applicable, does not cover labor, frames, systems and installation supplied by the dealer.

Replacement fabric canopy is covered for the time remaining in the original warranty and does not activate a new 7-year warranty.

CARE & CLEANING

Proper care and cleaning should be taken to ensure the life of RECacril® Outdoor Fabrics.

For regular care and maintenance, the excess dirt should be brushed from the fabric using a soft brush; the fabric should then be sprayed with warm water (not exceeding 104° Fahrenheit) and air-dried.

Periodically, the fabric should undergo a more thorough cleaning. Again, brush the fabric with a soft bristled brush, spray with warm water, and then apply a gentle soap. Let stand for 10 to 20 minutes taking care not to let it dry, then rinse thoroughly and air-dry. Do not use detergents and/or solvents.

Make sure to leave the umbrella or detached canopy outside until it is completely dried. This prevents mildew from forming.

INFINITY PROCESS

The RECacril® and RECasystem canvases are treated with a special technological process to ensure the lasting quality of the fabric. In this process nanoparticles completely cover the surface of the fibers in the fabric, forming a permanent coat. After treatment, both the surface and the inside of the fabric are permanently protected against dirt build-up, and adverse effects of a wide variety of atmospheric agents.

The low reactivity and high stability of the infinity treatment endows long-term protection to the fabric, especially against mildew, and provides excellent water and oil repellent.



